

# Evolution incasso | *built-in*



# Evolution corner






## Dettagli

## Details



Maniglia in legno e acciaio inox.  
Cerniere certificate per 30.000 aperture.  
Stufa rivestita in legno.  
Giunzioni invisibili senza viti a vista.

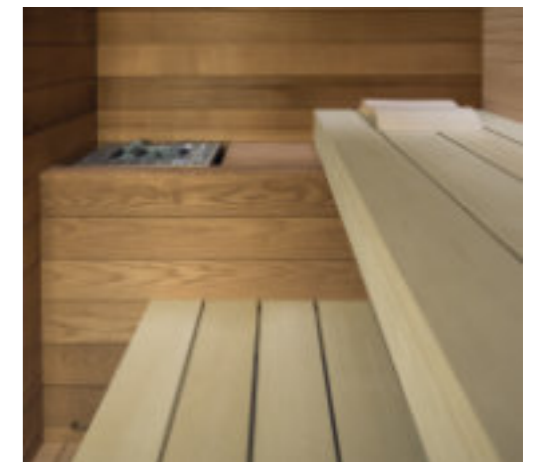

*Handle made of wood and stainless steel.  
Hinges certified for 30,000 openings.  
Heater covered with wood.  
Invisible joints with no visible screws.*



Pareti: Frassino termotrattato  
*Walls: thermo-treated Ash wood*

scala 1:1

scale 1:1

115  
mm




Panche: Tiglio naturale essiccato  
*Benches: Natural dried Linden wood*

scala 1:1

scale 1:1

140  
mm

9  
mm



## Scheda tecnica: sauna Evolution

Funzioni	Sauna finlandese
Temperatura	60 – 90°C
Umidità relativa	10 – 15%
Sistema di riscaldamento	Stufa elettrica adatta per uso professionale continuativo
Sistema di controllo	Tastiera esterna remotabile
Tensione elettrica	Standard 400V trifase, su richiesta 230V monofase
Potenza elettrica	A seconda delle dimensioni
Materiale pareti	Legno di Frassino termotrattato e legno di Tiglio naturale essiccato
Decoro pareti	Doghe orizzontali
Spessore pareti	mm 73÷86
Profumo del legno	●●●●○
Pavimento	In legno, a griglia rigida, da installare in appoggio sul pavimento esistente
Porta	In cristallo temperato. Luce netta di passaggio cm 70x199. Spessore: 8mm
Forma delle panche	Sospese
Materiale delle panche	Legno di Tiglio naturale essiccato
Illuminazione	Punti luce lungo il perimetro del soffitto
Colore della luce	Bianco caldo 2700°K
Prodotti di consumo	Inclusa essenza Stenal Classic 0,5l
A cura del cliente	Pavimento perfettamente orizzontale e planare, rivestito in materiale lavabile (consigliato: gres porcellanato), allacciamento elettrico in corrispondenza del quadro elettrico
Manutenzioni periodiche	Pulizia con un panno bagnato e poche gocce di sanificante per sauna
Normativa	CE; su richiesta ETL per alcuni modelli
Produzione	Made in Italy

## Datasheet: sauna Evolution

Features	Finnish sauna
Temperature	60 – 90°C
Humidity	10 – 15%
Heating system	Electric heater suitable for professional continuous usage
Control system	External controls
Voltage	Standard 400V 3-phase, optional 230V 1-phase
Power consumption	Depending on size
Walls material	Thermo-treated Ash wood and natural dried Linden wood
Walls decoration	Horizontal boards
Walls thickness	mm 73÷86
Wood fragrance	●●●●○
Floor	Rigid wooden grille, to be positioned on the existing floor
Door	Tempered glass. Door clearance: 70x199 cm. Thickness: 8mm
Bench design	Suspended
Bench material	Natural dried linden
Lighting	Spots of light along the perimeter of the ceiling
Light colour	Warm white 2700°K
Included	Fragrance Stenal Classic 0,5l
Preparations by Others	Perfectly level floor, covered in washable material (we recommend ceramic tiles), power supply next to the electric panel
Regular maintenance	Clean using a wet cloth and a few drops of sauna sanitizer
Norms	CE, on request ETL on select models
Production	Made in Italy